



MJCF Gas Fryers -- Domestic & Export

Project _____
 Item _____
 Quantity _____
 CSI Section 11400 _____
 Approval _____
 Date _____

MJCF Gas Fryers -- Domestic & Export

Models

MJ1CF



Shown with optional analog controller and casters

Standard Features

- Open-pot design is easy to clean
- 80-lb (40 liter) oil capacity
- 150,000 Btu/hr input (37,783 kcal) (44 kw)
- Frying area 18" x 19" x 4-1/2" (45.7 x 48.3 x 11.4 cm)
- Millivolt controller (outside the cabinet), no electric connection required
- Reliable, centerline, fast-action temperature probe
- Deep cold zone, 1-1/4 in. (3.2 cm) IPS ball-type drain valve
- Master Jet burners ensure even heat distribution
- Stainless steel frypot and door, enamel cabinet
- Two twin baskets
- 6" steel legs with 1" adjustment
- 3/4" gas connection

Options & Accessories

- Analog or Digital controllers
- Piezo ignitor
- On/off toggle switch (millivolt controller only)
- Frypot cover
- Stand-alone spreader cabinet
- Casters
- Melt cycle (above controllers only)
- Full basket
- Triplet basket
- Crisper tray
- Sediment tray
- Splash shield

See Frymaster domestic price list for other available options and accessories

Specifications

Specifically designed for high production of chicken, fish and other breaded products


The MJ1CF has an 80-lb. (40 liter*) oil capacity. The frying area is 18" x 19" x 4-1/2" (45.7 x 48.3 x 11.4 cm). This 150,000 Btu/hr. (37,783 kcal/hr.) (44 kw) model is specifically designed for high production of chicken, fish and other breaded products.

The exclusive 1° action thermostat anticipates rapid rate of temperature rise, reducing temperature overshoot, extending oil life and producing a more uniformly-cooked product. Centerline thermostat mounting permits quick sensing of cold food placed in either basket.

The open stainless steel frypot has a large heat transfer area to fry more product per load. The open-pot design can be cleaned and wiped down by hand.

The large cold zone and forward sloping bottom help collect and remove sediment from the frypot to safeguard oil quality and support routine frypot cleaning.

*Liter conversions are for solid shortening @ 70°F.




8700 Line Avenue
 Shreveport, LA 71106-6800
 USA

Tel: 318-865-1711
 Tel: 1-800-221-4583
 Fax: 318-868-5987
 E-mail: info@frymaster.com

www.frymaster.com
 Bulletin No. 818-0467
 Revised 1/20/15



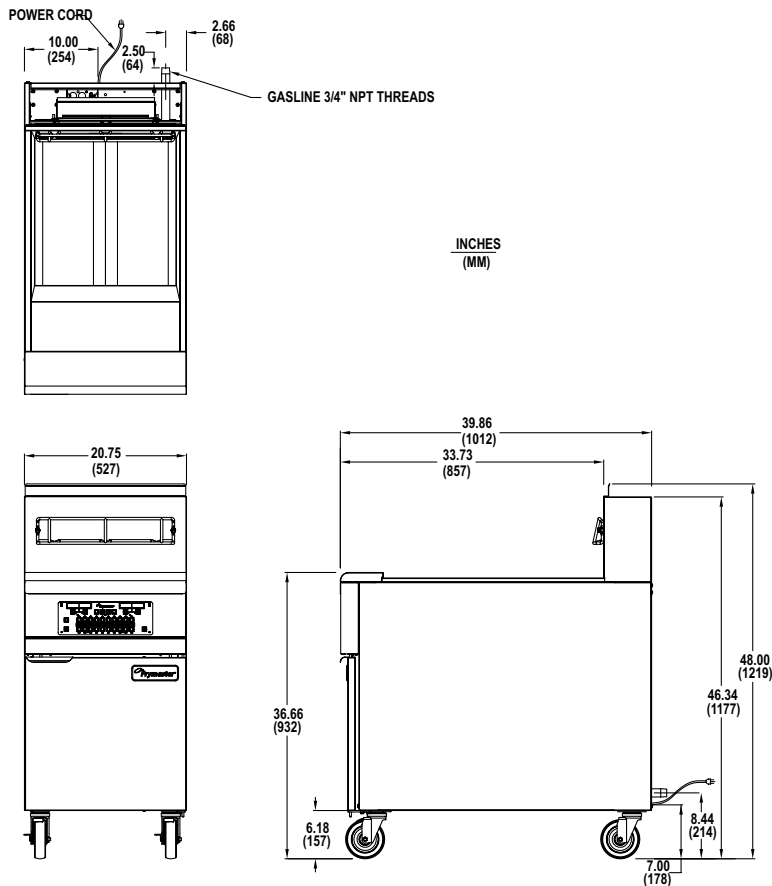

Model MJCFE Shown

DIMENSIONS

MODEL NO.	OIL CAPACITY	OVERALL SIZE (cm)			DRAIN HEIGHT	NET WEIGHT	SHIPPING INFORMATION					
		WIDTH	DEPTH	HEIGHT			WEIGHT	CLASS	CU. FT.	DIMENSIONS (cm)		
MJ1CF	80 lbs. (40 liters)	20-3/4" (53)	39-7/8" (101.2)	46-3/8" (117.7)	11-1/2" (29.2 cm)	250 lbs. (113 kg)	297 lbs. (135 kg)	85	31.96	W 25" (63.5)	D 47" (119.4)	H 47" (119.4)

POWER REQUIREMENTS

MODEL NO.	BASIC DOMESTIC/ EXPORT OPTIONS	
	CONTROLS/ FRYPOT	FILTER
MJ1CF	N/A (millivolt controller)	
Non-millivolt controllers	120V 1 A 220V 1 A	120V 8 A 220V 5 A

NOTES

- 1-1/2" (3.8 cm) kitchen main manifold gas supply line required. Gas inlet size (I.D.) should be no smaller than that provided for connection to the fryer(s). See service manual and/or plumbing codes for proper pipe sizing. Recommended minimum store manifold pressure to be 6" W.C. for natural gas and 11" W.C. for L.P. gas. Check plumbing codes for proper supply line sizing to attain burner manifold pressure of 3.5" W.C. natural or 8.25" W.C. L.P.

• DO NOT CURB MOUNT

CLEARANCE INFORMATION

- A minimum of 24" (61.0 cm) should be provided at the front of the unit for servicing and proper operation, 6" (15.2 cm) between the sides and rear of the fryer to any combustible material, and a minimum of 18" (45.7 cm) between the flue outlet and the lower edge of the exhaust hood filter.

HOW TO SPECIFY

The following descriptions will assist with ordering the features desired for this equipment:

- MJ1CF MJCF fryer with thermostat knob, millivolt controls
- SD Stainless steel frypot and door -- enamel cabinet
- SC Stainless steel frypot, door and cabinet
- SE Stainless steel pot, door, and cabinet ends

8700 Line Avenue
Shreveport, LA 71106-6800
USA

Tel: 318-865-1711
Tel: 1-800-221-4583
Fax: 318-868-5987
E-mail: info@frymaster.com

www.frymaster.com
Bulletin No. 818-0467
Revised 1/20/15
Litho in U.S.A. ©Frymaster

