



# Super Runner Value Gas Fryers

Project \_\_\_\_\_  
 Item \_\_\_\_\_  
 Quantity \_\_\_\_\_  
 CSI Section 11400 \_\_\_\_\_  
 Approval \_\_\_\_\_  
 Date \_\_\_\_\_

Super Runner Value Gas Fryers

## Models

SR42G

SR52G

SR62G



SR62G  
Shown with optional casters.

## Standard Features

- Tube-type frypot design
- Oil capacity
  - SR42G -- 43 lb. (21 liter)
  - SR52G -- 50 lb. (25 liter)
  - SR62G -- 75-lb. (37 liter)
- Btu/hr. input
  - SR42G -- 105,000 (26,481 kcal) (30.8 kw) (3-tube)
  - SR52G -- 120,000 (30,600 kcal) (35.2 kw) (4-tube)
  - SR62G -- 150,000 (37,783 kcal) (44 kw) (5-tube)
- Millivolt control system - requires no electrical hookup
- Durable temperature probe
- Frying area
  - SR42G 14" x 14" (35 x 35 cm)
  - SR52G 14" x 14" (35 x 35 cm)
  - SR62G 18" x 18" (46 x 46 cm)

- Thermo-tube design
- Wide cold zone
- Drain valve
  - SR42G -- 1" (2.5 cm)
  - SR52G & SR62G -- 1-1/4" (3.2 cm)
- Stainless steel frypot, front, door, and backsplash/flue cover, aluminized sides
- Wire form basket hanger and two fry baskets
- 6" (15 cm) steel legs with 1" adjustment

## Options Accessories

- Piezo ignitor
- Frypot covers
- Casters

See Dean domestic price list for other available options and accessories.

## Specifications

### Designed to economically meet basic frying needs

Fry a wide variety of products with Dean's Super Runner fryers which easily accommodate items from French fries to main entree menu selections. The fryers are available in three oil capacities utilizing 43 lbs., 50 lbs. and 75 lbs. of oil.

Make the most of your energy dollars with Dean's exclusive Thermo-Tube design. The heating tubes provide a large oil contact surface. Flow-tube baffles control the transfer of heat into the oil. Dean's wide cold

zone frypot protects oil integrity by trapping debris under the cooking area, preventing carbonization of particles and wasteful oil deterioration.

Dean's durable temperature probe assures prompt recovery which reduces time lost between loads and requires no electrical hookup.

Dean's Super Runner gas fryers achieve dependability through simplicity of design, durable stainless steel baffles and rugged cast iron burners.




5489 Campus Drive  
Shreveport, LA 71129  
USA

Tel: 318-865-1711  
Tel: 1-800-221-4583  
Fax: 318-868-5987  
E-mail: info@dean.enodis.com

<http://dean.enodis.com>  
Bulletin No. 830-0117  
Printed 10/08  
Revised 9/12/11  
Litho in U.S.A. ©Frymaster



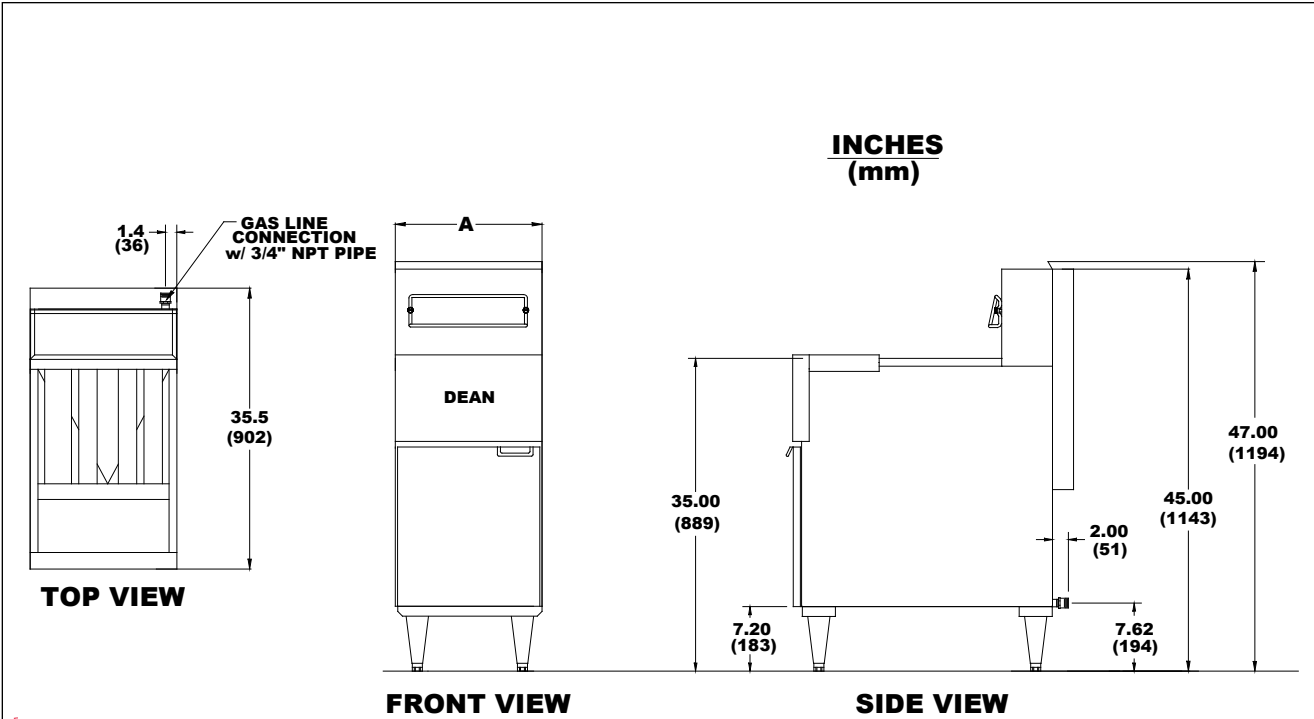

MODEL	OIL CAPACITY	OVERALL SIZE (cm)			DRAIN HEIGHT (cm)	NO. OF TUBES	NET WEIGHT	APPROXIMATE SHIPPING DIMENSIONS					
		HEIGHT	WIDTH (A)	LENGTH				WEIGHT	CLASS	CU. FT.	DIMENSIONS (cm)		
											H	W	L
SR42G	43 lbs. (32 liter)	45" (114.3)	15-1/2" (39.4)	29-1/4" (74.3)	18-3/8" (46.7)	3	111 lbs. (50 kg)	150 lbs. (68 kg)	85	22	48-1/2" (123.2)	20-1/2" (52.1)	36" (91.4)
SR52G	50 lbs. (25 liter)	45" (114.3)	15-1/2" (39.4)	29-1/4" (74.3)	17-1/2" (44.5)	4	121 lbs. (55 kg)	180 lbs. (82 kg)	85	22	48-1/2" (123.2)	20-1/2" (52.1)	36" (91.4)
SR62G	75 lbs. (42 liter)	45" (114.3)	20" (50.8)	35-1/2" (90.2)	19-3/4" (50.2)	5	176 lbs. (80 kg)	255 lbs. (116 kg)	85	22	48-1/2" (123.2)	20-1/2" (52.1)	36" (91.4)

**POWER REQUIREMENTS**

MODEL	DOMESTIC NATURAL OR LP GAS INPUT RATING	CE NATURAL OR LP GAS INPUT RATING	GAS CONNECTION	ELECTRICAL REQUIREMENT
SR42G	105,000 Btu/hr. (26,481 kcal/hr.) (30.8 kw/hr.)	76,792 Btu/hr. (19,343 kcal/hr.) (22.5 kw/hr.)	3/4" N.P.T. Regulator not required for manifold pressure. See note below.*	NONE
SR52G	120,000 Btu/hr. (30,600 kcal/hr.) (35 kw/hr.)	102,390 Btu/hr. (25,790 kcal/hr.) (30 kw/hr.)		
SR62G	150,000 Btu/hr. (37,783 kcal/hr.) (44 kw/hr.)	102,390 Btu/hr. (25,790 kcal/hr.) (30 kw/hr.)		

**HOW TO SPECIFY**

The following description will assist with ordering the features desired for this equipment:

- SR42 43 lb. value, tube-type gas fryer with millivolt control system and durable temperature probe
- SR52 50-lb. value, tube-type gas fryer with millivolt control system and durable temperature probe
- SR62 75-lb. value, tube-type gas fryer with millivolt control system and durable temperature probe

**NOTE:**

DO NOT CURB MOUNT.  
 \*SUPPLY PRESSURE: DO NOT EXCEED 14" W.C. or 1/2 PSI.  
 Please specify:  
 Natural or propane gas  
 Altitude -- if above 2000 ft. (610 m)

Model # \_\_\_\_\_  
CSI Section 11400